# **Product datasheet**

Specification





Pilot light, Harmony 9001SK, plastic, polycarbonate, domed, white, 30mm, LED white, 24-28V

9001SKP35LWW9

#### Main

| Range Of Product          | Harmony 9001SK    |
|---------------------------|-------------------|
| Product Or Component Type | Pilot light       |
| Device Short Name         | 9001SK            |
| Lens Type                 | Domed plastic     |
| Light Block Supply        | Direct 24 V AC/DC |

### Complementary

| Plastic   |
|---|
| 30 mm   |
| Round   |
| White   |
| LED   |
| BA 9s   |
| 2428 V AC/DC  |
| 0.8 N.m conforming to EN/IEC 60947-1                                    |
| Cross slotted   |
| Screw clamp terminals, 1 x 0.222 x 1.5 mm² conforming to EN/IEC 60947-1 |
| 10 A  |
| 10 A cartridge fuse conforming to EN/IEC 60947-5-1                      |
| 250 V (pollution degree 2) conforming to EN/IEC 60947-1                 |
| 2.5 kV conforming to EN/IEC 60947-1                                     |
| Any position  |
| 54 mm   |
| 70 mm   |
| 42 mm   |
| 0.082 kg  |
| Complete product  |
| Domed   |
| 2428 V  |
| White   |
| Polycarbonate   |
|   |

| Size         | 30 mm |
|--------------|-------|
| Light Source | LED   |

## **Environment**

| Electrical Shock Protection Class     | Class II conforming to IEC 61140              |
|---------------------------------------|---|
| Protective Treatment                  | TC  |
| Ip Degree Of Protection               | IP66 conforming to IEC 60529                  |
| Nema Degree Of Protection             | NEMA 1  |
|                                       | NEMA 12                                       |
|                                       | NEMA 13                                       |
|                                       | NEMA 2  |
|                                       | NEMA 3  |
|                                       | NEMA 3R                                       |
|                                       | NEMA 4  |
|                                       | NEMA 4X                                       |
| Vibration Resistance                  | 7 gn (f= 2500 Hz) conforming to IEC 60068-2-6 |
| Shock Resistance                      | 50 gn conforming to IEC 60068-2-27            |
| Ambient Air Temperature For Operation | -2570 °C                                      |
| Ambient Air Temperature For Storage   | -4070 °C                                      |
| Standards                             | EN/IEC 60947-5-4                              |
|                                       | EN/IEC 60947-1                                |
|                                       | EN/IEC 60947-5-1                              |
|                                       | CSA C22.2 No 14                               |
|                                       | JIS C8201-5-1                                 |
|                                       | UL 508  |
|                                       | JIS C 852                                     |
|                                       | JIS C8201-1                                   |
| Product Certifications                | UL 508  |
|                                       | NEMA  |
|                                       |   |

# **Packing Units**

| Unit Type Of Package 1       | PCE       |
|------------------------------|-----------|
| Number Of Units In Package 1 | 1         |
| Package 1 Height             | 4.572 cm  |
| Package 1 Width              | 5.334 cm  |
| Package 1 Length             | 9.144 cm  |
| Package 1 Weight             | 226.796 g |

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Well-being performance

| <b>⊘</b> | Reach Free Of Svhc         |     |
|----------|----------------------------|-----|
| <b>9</b> | Toxic Heavy Metal Free     |     |
| <b>②</b> | Mercury Free               |     |
| <b>⊘</b> | Rohs Exemption Information | Yes |


#### **Certifications & Standards**

| Reach Regulation         | REACh Declaration   |
|--------------------------|---|
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration   |
| China Rohs Regulation    | China RoHS declaration  |
| Environmental Disclosure | Product Environmental Profile   |
| Weee                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile      | End of Life Information   |

## 9001SKP35LWW9

#### **Dimensions Drawings**

#### **Dimensions**

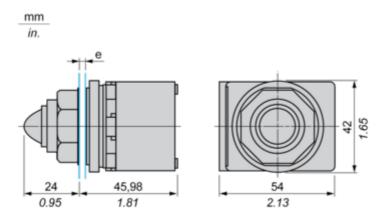

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.