

# Product datasheet

Specifications



## Rack PC 4U Perf HMIRSP HDD, AC 6 slots, Windows 7 for EcoStruxure Hybrid

HMIRSPHXA67P1

 To be discontinued on: 30-Jun-2025

 To be end-of-service on: 30-Jun-2025

 Discontinued - Service only

### Main

|                           |   |
|---------------------------|---|
| Range Of Product          | Harmony iPC   |
| Product Or Component Type | Industrial rack PC  |
| Device Short Name         | Rack PC 4U Performance  |
| Range Compatibility       | IDisplay  |
| Processor Name            | Intel Xeon quad-core 1225 3.1 GHz L3 cache 8 MB   |
| Storage Slots             | 1 internal slot (SATA3)<br>4 hot swap trays (SATA2)   |
| Data Storage Equipment    | 500 GB Internal enterprise hard disk - hot swap   |
| Memory Description        | Up to 32 GB RAM DDR3 internal in 4 slot(s)<br>16 GB RAM DDR3 internal in 2 slot(s) (by default) |

### Complementary

|                            |  |
|----------------------------|--|
| Number Of Slots            | 3 PCI<br>4 PCI express 16x   |
| Drive Type                 | DVD-RW   |
| Video Controller Type      | Intel HD Graphics 2500   |
| Display Resolution         | 2048 x 1536 pixels   |
| Watchdog Timer             | 1...255 ms   |
| Type Of Cooling            | 2 fans with speed control  |
| Integrated Connection Type | 1 VGA<br>1 DVI video port<br>2 USB 3.0 port<br>1 COM1 serial link - male SUB-D 9 - RS232<br>1 audio micro input<br>1 audio line output<br>4 USB 2.0 port<br>4 COM1 serial link (optional) - male SUB-D 9<br>2 Ethernet - RJ45 (rate: 10/100/1000 Mbit/s) |
| Switch Application         | Case open  |
| Operating System           | Windows 7 64 bits Ultimate - multi-language  |
| Software Package           | Vijeo Designer run time demo run time demo license not included<br>EcoStruxure Operator Terminal Expert run time demo license not included<br>PES license not included   |
| Motherboard Type           | ATX  |
| [Us] Rated Supply Voltage  | 100...240 V AC power supply  |
| Power Consumption In W     | 500 W  |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                  |          |
|------------------|----------|
| Mounting Support | 19" rack |
| Depth            | 601.4 mm |
| Height           | 172.7 mm |
| Width            | 482 mm   |
| Net Weight       | 20.8 kg  |

## Environment

|                                       |   |
|---------------------------------------|---|
| Product Certifications                | CCC<br>EAC<br>CULus   |
| Standards                             | CSA 22-2 No 60950-1-07<br>EN 55011: class A group 1<br>EN 60950-1<br>EN 61000-6-2<br>EN 61000-6-4<br>FCC part 15<br>UL 60950-1                      |
| Quality Labels                        | CE  |
| Directives                            | 2006/95/EC - low voltage directive<br>2004/108/EC - electromagnetic compatibility   |
| Ip Degree Of Protection               | IP40 conforming to IEC 60529  |
| Ambient Air Temperature For Storage   | -20...60 °C conforming to IEC 60068-2-2   |
| Relative Humidity                     | 10...85 % non-condensing conforming to IEC 60068-2-78   |
| Ambient Air Temperature For Operation | 0...40 °C conforming to IEC 60068-2-2   |
| Vibration Resistance                  | 0.002 g <sup>2</sup> /Hz (f = 5...500 Hz) operating conforming to IEC 60068-2-64<br>2 gn (f = 5...500 Hz) not operating conforming to IEC 60068-2-6 |
| Shock Resistance                      | 10 gn for 11 ms conforming to IEC 60068-2-27  |

## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type Of Package 1       | PCE     |
| Number Of Units In Package 1 | 1       |
| Package 1 Height             | 17.7 cm |
| Package 1 Width              | 60.0 cm |
| Package 1 Length             | 48.2 cm |
| Package 1 Weight             | 20.8 kg |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

# Sustainability


**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.


[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

## Well-being performance

 Reach Free Of Svhc

 Toxic Heavy Metal Free

 Mercury Free

|                       |   |
|-----------------------|---|
| Reach Regulation      | <a href="#">REACH Declaration</a>   |
| Eu Rohs Directive     | Not applicable, out of EU RoHS legal scope  |
| China Rohs Regulation | <a href="#">China RoHS declaration</a>  |
| Weee                  | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |


Dimensions Drawings

Dimensions


Top View



Front View

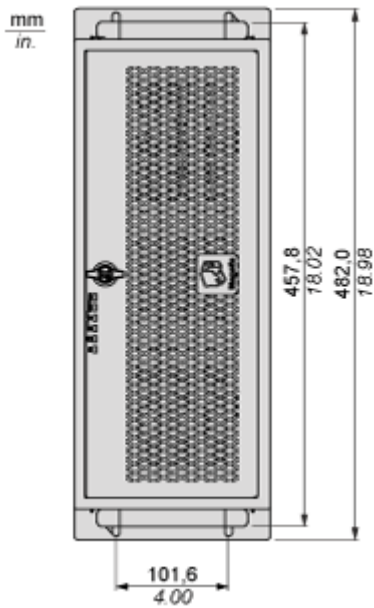

Side View

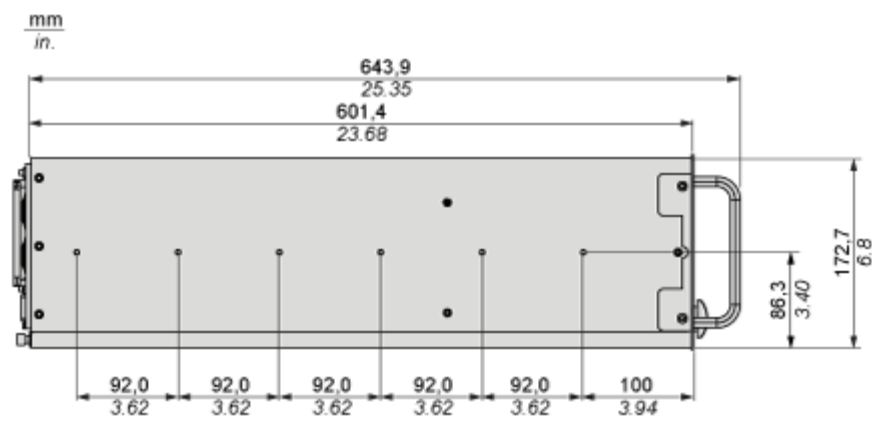

Mounting and Clearance

Mounting

---

Unit Designed for M4 Screws

