



### Main

|                           |   |
|---------------------------|---|
| Range of product          | Harmony XVR   |
| Product or component type | Prewired rotating mirror beacon                     |
| Sound signalling          | Buzzer  |
| Device short name         | XVR   |
| Mounting diameter         | 120 mm  |
| IP degree of protection   | IP23 conforming to IEC 60529                        |
| [Us] rated supply voltage | 24 V AC/DC  |
| Light source              | High luminosity LED, red                            |
| Noise level               | 50...90 dB (continuous or intermittent tone) at 1 m |

### Complementary

|  |   |
|--|---|
| Material                               | ABS (acrylonitrile butadiene-styrene) (body part)<br>AS (globe) |
| CAD overall width                      | 120 mm  |
| CAD overall depth                      | 120 mm  |
| Product weight                         | 0.5 kg  |
| Marking                                | CE  |
| Product mounting                       | By 3 M5 screws  |
| Supply voltage limits                  | 21.6...26.4 V AC<br>19...30 V DC                                |
| [Uimp] rated impulse withstand voltage | 0.8 kV  |
| Current consumption                    | 196 mA  |
| Flashing frequency                     | 2.3 Hz  |
| Clamping connection capacity           | 0.83 mm <sup>2</sup>  |
| AWG gauge                              | AWG 18  |
| Cable length                           | 400 mm  |

### Environment

|           |              |
|-----------|--------------|
| Standards | EN 61000-6-2 |
|-----------|--------------|

EN 61000-6-4

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Protective treatment                  | TC                               |
| Ambient air temperature for storage   | -35...70 °C                      |
| Ambient air temperature for operation | -10...50 °C                      |
| Electrical shock protection class     | Class II conforming to IEC 61140 |

### Offer Sustainability


|                                  |   |
|----------------------------------|---|
| Sustainable offer status         | Green Premium product   |
| RoHS (date code: YYWW)           | Compliant - since 1611 - Schneider Electric declaration of conformity<br><a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold<br><a href="#">Reference not containing SVHC above the threshold</a>                |
| Product environmental profile    | Available<br><a href="#">End of Life Information</a>  |
| Product end of life instructions | Available   |

### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Rotating Mirror Beacon

Dimensions

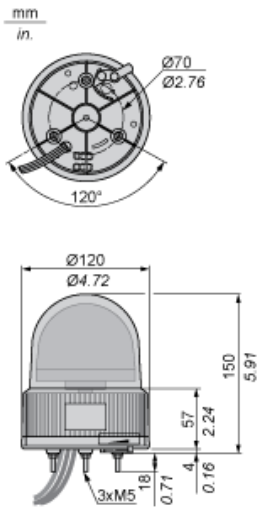

---

Rotating Mirror Beacon

---

Panel Cut-out

